

# HEAT TRANSFER ENHANCEMENT OF SERPENTINE SHAPED MICRO CHANNEL HEAT SINK WITH $\text{Al}_2\text{O}_3$ /WATER NANOFLUID

Mr. A. Sivakumar, Dr.N. Alagumurthi and Dr.T.Senthilvelan

Department of Mechanical Engineering

Pondicherry Engineering College, Puducherry

**Abstract**— Suspended nanoparticles in conventional fluids, called nanofluids, have been the subject of intensive study worldwide since pioneering researchers recently discovered the anomalous thermal behavior of these fluids. The heat transfer from smaller area is achieved through microchannels. The heat transfer principle states that maximum heat transfer is achieved in microchannels with maximum pressure drop across it. In this research work the experimental and numerical investigation for the improved heat transfer characteristics of serpentine shaped microchannel heat sink using  $\text{Al}_2\text{O}_3$ /water nanofluid is done. The fluid flow characteristics is also analyzed for the serpentine shaped microchannel. The experimental results of the heat transfer using  $\text{Al}_2\text{O}_3$  nanofluid is compared with the numerical values. The calculations in this work suggest that the best heat transfer enhancement can be obtained by using a system with an  $\text{Al}_2\text{O}_3$ -water nanofluid-cooled micro channel with serpentine shaped fluid flow.

**Key words**— Serpentine shaped, Microchannel Heat sink, Heat Transfer, Friction factor, Nanofluid  $\text{Al}_2\text{O}_3$ .

## I. INTRODUCTION

The application of micro channels in heat transfer was first proposed by Tuckerman and Pease [1] in the electronic chip which could be effectively cooled by means of water flow in microchannels fabricated on the circuit board on which the chips are mounted. The need for thermal management in high end power electronic workstations cooling, application servers and data centers [2] is an exceedingly demanding area that requires continuous research efforts to develop efficient and cost competitive cooling solutions. Some of the commonly used heat transfer fluids are the Air, ethylene glycol and engine oil for the past some decades[3].

The nanofluids were first introduced by Choi[4] in the Argonne National Laboratory, USA, who found that nano particles increases the thermal conductivity of the working fluid, thus improving the heat transfer performance. The researchers S. Lee, J. Koo[5,6] proved that nano particles has enhanced thermal conductivity than the base fluids which shows the nano sized particles has good potential in the thermal area.

Nanofluids are defined as suspension of nanoparticles in a basefluid. Some typical nanofluids are ethylene glycol based copper nanofluids and water based copper oxide nanofluids, Nanofluid are dilute suspensions of functionalized nanoparticles composite materials developed about a decade ago with the specific aim of increasing the thermal conductivity of heat transfer fluids, which have now evolved into a promising nanotechnological area. Such thermal nanofluids for heat transfer applications represent a class of its own difference from conventional colloids for other applications. Compared to conventional solid-liquid suspensions for heat transfer intensifications, nanofluids possess the following advantages [7].

- Increased surface area therefore more heat transfer surface between particles and fluids
- High dispersion stability with predominant Brownian motion of particles.
- The pumping power is reduced as compared to pure liquid due to heat transfer intensification
- There is no particle clogging compared to conventional slurries which results in system miniaturization
- Adjustable properties, including thermal conductivity and surface wettability, by varying particle concentrations to suit different applications.

The  $\text{Al}_2\text{O}_3$  water nano fluids was formulated by Lee et al [8] without any chemical dispersants and performed experiments to show that  $\text{Al}_2\text{O}_3$  water nanofluids have good suspension and dispersion characteristics and high thermal conductivities. The importance of micron size mechanical devices are emphasized both in commercial and scientific application [9,10]. Kandlikar et al[11]. also insisted the the need of micro system in for heat transfer enhancement in micro scale devices.

Jung-Yeul et al [12] have reported that the Nusselt number increases with increasing Reynolds number in laminar regime in his experimental study. Nanofluids have a higher single phase heat transfer coefficient, especially for laminar flow, due to increased thermal conductivity [13,14].

Microchannel heat exchangers are classified as micro, meso, compact and conventional heat exchanger based on channel diameters [15]. In this study the heat transfer characteristics of water /  $\text{Al}_2\text{O}_3$  flowing through serpentine MC and hydraulic diameter of 0.81mm is investigated.

## II. TEST SECTION

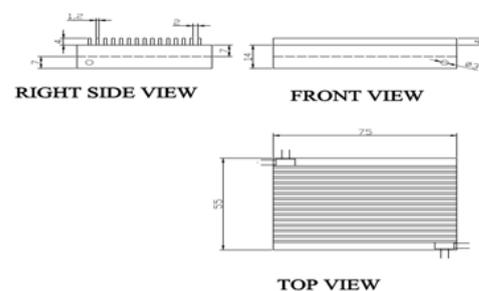


Fig.1. Micro channel test section

The micro channel is fabricated using the material copper. The copper is chosen for its improved corrosion resistance, thermal conductivity and smooth surface finishing. The copper plates are faced to for its required thickness. The plate is grinded in a bed type surface-grinding machine in order to get a

smooth surface. The machining is done on the surface of the bottom plate. The inlet and outlet sumps are machined using milling process, then the channels are cut on the surface of the bottom plate using EDM process according to the dimensions shown in the fig (1). The map of the microchannel with fin core section is presented in section (2). To have circulation of the working fluid the hole is drilled on the on the surfaces of the bottom plate connecting the inlet sump with inlet surface and the outlet sump with outlet surface respectively.

Hydraulic pipe of standard dimension is brazed in the inlet and outlet surfaces of the microchannel, which is used as a connecting medium between the micro channel and the components of the experimental set-up. The square plate of side 75 mm and thickness 55mm is taken as top plate of the micro channel. Convection fins are machined on the top surface of the plate to enhance the heat transfer rate. This plate is used to cover the machined surface of the bottom plate. The EDM is considered to be a non-conventional machining technique. It is a process whereby the material is removed through the erosive action of electrical discharge (sparks) provided by a generator. With a precision EDM dimensional tolerances up to 0.5µm could be obtained. A high speed EDM technique enables a dimensional tolerance up to 1.5 micro meter and a machining speed of 5 µ/ sec to be obtained. The smaller electrode used has a diameter of 30 micro meter, subsequent to this pioneering work. The interest in micro EDM machining remained sedate until micro-electronics era emanated. Even 3D shapes (that prove difficult for etching) are done easily with EDM (Reyemaerts et al.,). Inlet and out conduits were attached together with the two plates and brazed in vacuum furnace at 5-10 torr and about 1000°C.



Fig.2. Core section of the microchannel with fin

### III. EXPERIMENT STUDY

#### A. Preparation of Nanofluid

Gamma Copper oxide was used for the preparation of  $\gamma$   $Al_2O_3$  Nanofluid with water as the Base material.  $\gamma$   $Al_2O_3$  nanoparticles were dispersed in 3.5 lits of ultra pure double distilled water under sonification at different volume fraction say 0.01,0.02,0.03,0.1,0.2,0.3 and tested for the heat transfer property of the material in the microchannel.

#### B. Characterisation of Nanofluid

Characterisation Analysis were carried out using Scanning Electron Microscope (SEM) and Energy dispersive Atomic X Ray( EDAX) .

#### C. Heat transfer experimental setup

A schematic diagram of the experimental apparatus is shown in Fig. (3). The test loop consists of a Ultrasonic vibration Bath, Pump, Filter, Flow meter ,Micro-channel,

Heater and Air cooled heat exchange. In the present study,  $Al_2O_3$  nanofluids are stored in the ultrasonic vibration bath. This bath acts as a reservoir and sonicator. A heater is fixed on the surface of the microchannel. A pump is attached between the bath and the microchannel to circulate nanofluids through the entire circuit. The unwanted micron size particle are removed using filters. Flow meter is placed between the pump and micro channel. Fluid flow rate is controlled by the valve and it is placed between the pump and channel. The pressure gauges are fixed at the inlet and outlet of the micro channel and used to measure the pressure drop of the channel. When the nano fluid passes through microchannel, it absorbs some amount of heat supplied by the heater. The excess heat carried by the nano fluid is released when it passes through the air cooled heat exchanger Then the fluid moves to the bath and the cycle is repeated. The entire set-up is kept airtight in order to prevent any leakage of the fluid.

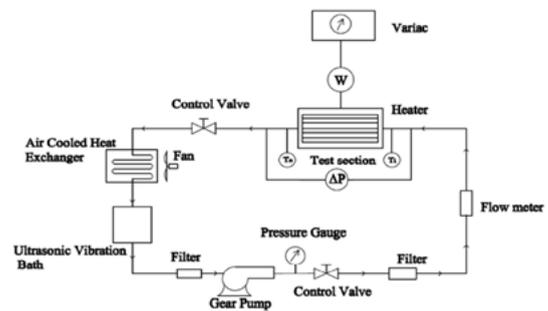


Fig.3. Schematic diagram of the experimental setup

### IV. DATA ANALYSIS AND PROCESSING

#### A. Thermophysical properties of nanofluids

Since we use nanofluids for the heat removal their thermo physical property and the governing equation involved are calculated using the following equation[16]

$$\text{Density: } \rho_{nf} = (1-\phi)\rho_{bf} + \phi\rho_p \quad (1)$$

$$\text{Heat capacity: } (\rho c_p)_{nf} = (1-\phi)(\rho c_p)_{bf} + \phi(\rho c_p)_p \quad (2)$$

$$\text{Thermal conductivity: } k_{nf} = \frac{[k_p + 2k_{bf} + 2(k_p - k_{bf})\phi]}{[k_p + 2k_{bf} - 2(k_p - k_{bf})\phi]} k_{bf} \quad (3)$$

$$\text{Viscosity: } \mu_{nf} = \mu_{bf} (1 + 2.5) \phi \quad (4)$$

### V. DATA PROCESSING

The Reynolds number is defined in the conventional way,  $Re = \rho v d / \mu$ . The velocity is calculated from flow rate based on the cross-sectional area of the channel. The velocity is evaluated using the mass flow rate and the equivalent diameter  $D_h = 2WH / (W+H)$ . The mass flow rate was evaluated based on the density at inlet condition.

The balance between the energy supplied and energy absorbed by the flowing liquid is established using the following equations:

$$Q_s = V \times I \text{ (heat supplied)} \quad (5)$$

$$Q = m C_{p,nf} (T_{out} - T_{in})_{nf} \text{ (heat absorbed)} \quad (6)$$

Experimental convective heat transfer coefficient and Nusselt number for nanofluid were calculated from the following equations: [17]

$$h_{(Exp)} = \frac{Q}{A(T_w - T_m)} \quad (7)$$

$$Nu_{(Exp)} = \frac{h_{(exp)} \cdot D_h}{k_{nf}} \quad (8)$$

The liquid reference temperature  $T_m$  is arithmetic mean of the inlet temperature and outlet temperature, that is

$$T_m = \frac{T_{in} + T_{out}}{2} \quad (9)$$

The mean heat flux  $q$  relative to the base plate area  $A$  is as follows

$$q = h_{(Exp)} \cdot (T_w - T_m) \quad (10)$$

In general, for total length of the micro channel with 'n' vertical passage and (n-1) circumferential passage is given by

$$L_{ch} = nl + (n-1)(2\pi r) + 2r \quad (11)$$

The hydraulic performance of the heat sink can be evaluated by means of the friction factor defined as [18]

$$f = \frac{\Delta p}{2\rho_{nf} u_m^2 L_{ch}} \quad (12)$$

Experimental friction factor is compared with the theoretical values obtained using Hagen-Poiseuille equation given by

$$f = \frac{64}{Re} \quad (13)$$

Reynolds and prandtl number are calculated using following equations:

$$Re = \frac{\rho_{nf} u_m D_h}{\mu_{nf}} \quad (14)$$

$$Pr_{nf} = \frac{\mu_{nf} C_{p,nf}}{k_{nf}} \quad (15)$$

Experimental heat transfer coefficient is compared with the theoretical heat transfer coefficient values obtained using Dittus-Boelter given by [18]

$$Nu_{the} = 0.024 Re^{0.8} Pr^{0.4} \quad (16)$$

$$Nu_{(the)} = \frac{h_{(the)} D_h}{k} \quad (17)$$

$$h_{(the)} = \frac{Nu_{(the)} \cdot k}{D_h} \quad (18)$$

$$\text{Thermal resistance is calculated as, } R = \frac{T_w - T_m}{q} \quad (19)$$

S.N	Reynolds No ,Re	Flow Velocity (m/s)	Friction Factor (f)	Pressure Drop (Bar)	Nusselt No. Nu	Heat transfer coefficient (W/m <sup>2</sup> k)
1	100	0.1271	0.6400	0.4673	2.703794	7572.313
2	200	0.2542	0.3200	0.9346	4.707578	13184.16
3	300	0.3814	0.2133	1.4019	6.511343	18235.83
4	400	0.5085	0.1600	1.8692	8.196371	22954.96
5	500	0.6356	0.1280	2.3364	9.798274	27441.29
6	600	0.7627	0.1067	2.8037	11.33691	31750.42
7	700	0.8899	0.0914	3.2710	12.82484	35917.57
8	800	1.0170	0.0800	3.7383	14.27071	39966.91
9	900	1.1441	0.0711	4.2056	15.68078	43915.98
10	1000	1.2712	0.0640	4.6729	17.05979	47778.06
11	1100	1.3984	0.0582	5.1402	18.41144	51563.53

Table 10 Theoretical values for different Reynolds number in microchannel

Note: (1) properties of water are evaluated at 25°C:  $C_p = 4187 \text{ J/kg}^\circ\text{C}$ ,  $\rho = 997 \text{ kg/m}^3$ ,  $k = 0.613 \text{ W/m}^\circ\text{C}$  (2) properties of  $\text{Al}_2\text{O}_3$  are evaluated at 25°C:  $C_p = 765 \text{ J/kg}^\circ\text{C}$ ,  $\rho = 3970 \text{ kg/m}^3$ ,  $k = 36 \text{ W/m}^\circ\text{C}$ . [20]

## VI. RESULTS AND DISCUSSION

### A. SEM&EDAX Analysis

Fig.(4) SEM analysis revealed that the  $\text{Al}_2\text{O}_3$  particles were spherical in nature with a diameter of around 15 nm. Fig.(5) EDAX report conformed the presence of Copper and oxygen with the weigh % of 50.12 and 49.88 respectively.

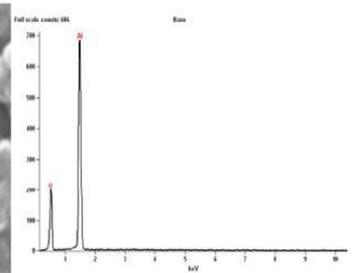
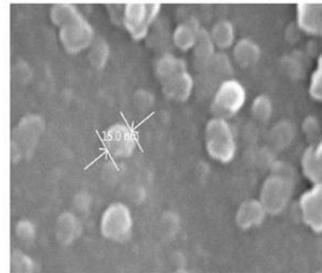


Fig.4 SEM of  $\text{Al}_2\text{O}_3$  particle

Fig.5 EDAX of  $\text{Al}_2\text{O}_3$  particle

The thermo physical properties of 0.3%  $\text{Al}_2\text{O}_3$  / water nanofluid were estimated as follows:

Density = 1888.9  $\text{kg/m}^3$ , Heat capacity = 3160.4  $\text{J/kg}^\circ\text{K}$ ,  
Thermal conductivity = 2.2405  $\text{W/mK}$ ,  
Viscosity = 0.00149625  $\text{Cp}$ .

### B. Pressure drop analysis

The pressure drop is calculated experimentally for the  $\text{Al}_2\text{O}_3$  water nanofluid for the serpentine shaped microchannel to investigate two characteristics of the nanofluids. Friction factor obtained for the microchannel heat sink using the pure water ( $\phi=0.01$  to 0.3vol. %) as well as nanofluid ( $\phi=0.01$  to 0.3vol.%) as coolant are done Substituting the measured pressure drop into equation (13), the Darcy friction  $f = 64/Re$  is calculated.

## VII. HEAT TRANSFER ANALYSIS

The convective heat transfer coefficient shown in fig 6. Clearly states that the heat transfer characteristics of  $\text{Al}_2\text{O}_3$  nanoparticle when suspended in the water has enhanced heat

transfer property in the micro channel heat sink. All though the volume fraction of nano particles is very low range from 0.01 to 0.3vol.%. The convective heat transfer coefficient of water-based  $Al_2O_3$  nanofluids increases with volume fraction of  $Al_2O_3$  nano particles. Similar finding was reported in previous experiment work [21].

1) Nu correlations

The relation between the Nusselt number (Nu) and Reynolds (Re) is based on the channel hydraulic diameter which is shown in Fig (7). For 0.3 vol.%, maximum value of 18.30 Nu was achieved at highest Re of 1233.77. The experimental results show an appreciable fluid dependence.

The experimental data from the present work had been used to determine the following relation

$$Nu = C Re^a Pr^n \quad (20)$$

The values in equation (20) for correlation coefficient C and indices a and n are obtained.

An empirical relation is obtained for Nusselt Number in terms of Reynolds number and prandtl as below

$$Nu = 0.83 Re^{0.92} Pr^{0.2} \quad (21)$$

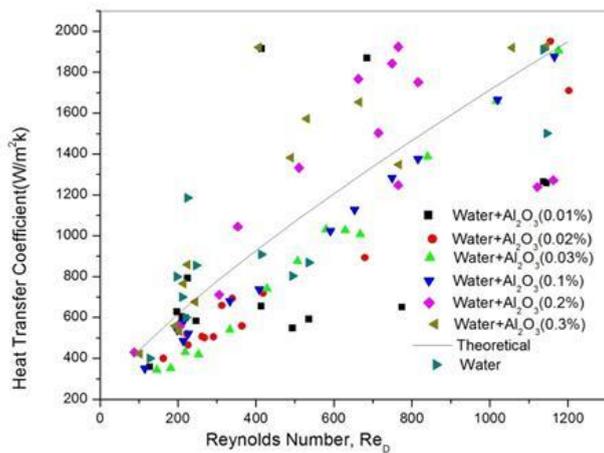


Fig.6. Experimental heat transfer coefficient is compared with the theoretical heat transfer coefficient values obtained using Dittus-Boelter, shown in table (1).

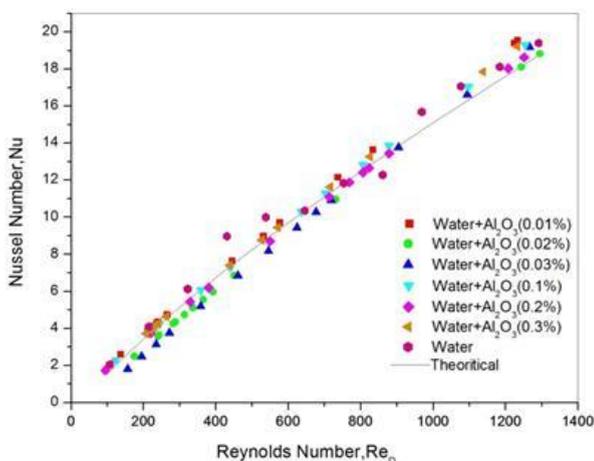


Fig.7. Comparison of experimental Nusselt with the theoretical values obtained using the Dittus-Boelter, shown in Table (1).

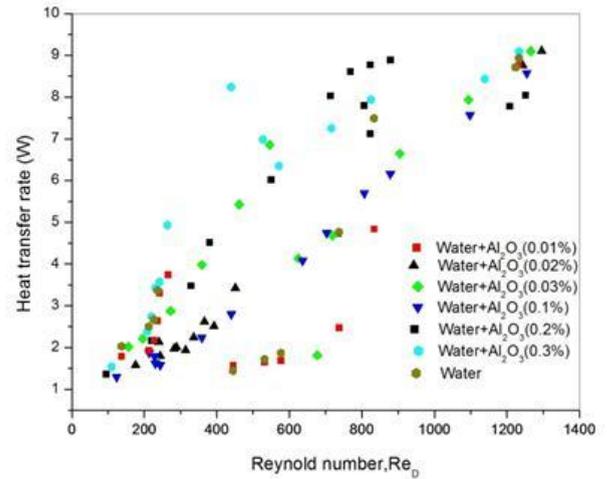


Fig 8. Total heat transfer versus Reynolds number and concentration of nanofluid

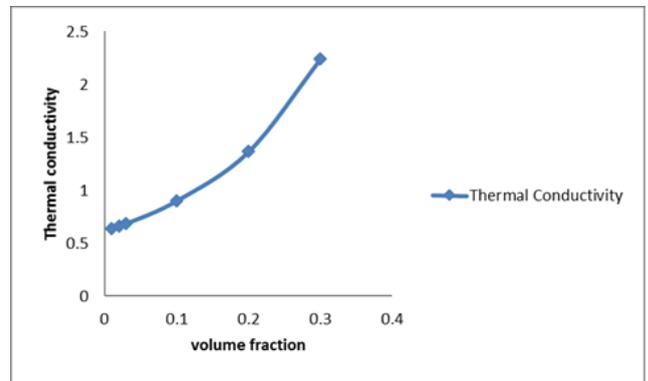


Fig. 9. Thermal conductivity versus volume fraction and concentration of nanofluid.

VIII. CONCLUSIONS

In this research work the heat transfer characteristics of serpentine shaped microchannel heat sink with  $Al_2O_3$ /water nanofluid is experimented and its enhanced thermal conductivity is compared with the base fluid. Based on the heat transfer enhancement and fluid flow characteristics the various plots showing the relation is plotted for the conclusion. The flow and heat transfer characteristics of the heat sink cooled by 0.01, 0.02, 0.03, 0.1, 0.2 and 0.3 vol % nanofluids have been presented. The following conclusions are drawn from this research:

Based on the pressure drop the for the  $Al_2O_3$  water nanofluid the friction factors is measured and it has good coordination with theoretical results of the Darcy friction factor correlation for the fully developed laminar flow. The convective heat transfer coefficient for the low volume percentage there is considerable enhanced thermal conductivity for the  $Al_2O_3$ /water nanofluid.

Thermal performance of nanofluids in all concentration study showed better efficiency than pure water. Temperature distributions on the serpentine MC were very much lower using nanofluid compared to pure water.

Thermal Resistance of the MC heat sink was decreased when using  $Al_2O_3$ . When the volume fraction is increased in the water- $Al_2O_3$  ranges from 0.01 - 0.3, then the nanofluid thermal conductivity increases considerably and also heat

transfer performance has been enhanced, which is shown in fig.(8) and fig.(9)

The experimental performance study of MC load with nanofluids proved its potential as an alternative working fluid compared to conventional pure water.

#### REFERENCES

- [1] D.B. Tuckerman, R.F.W. Pease, High-performance heat sinking for VLSI, IEEE Electr. Dev. Lett. EDL-2(1981) 126-129
- [2] Randeep singh, Aliakbar, Sintered porous heat sink for cooling of high-powered microprocessors for server applications for International Journal of Heat and Mass Transfer 52 (2009) 2289-2299.
- [3] Tu-Chieh Hung, Wei-Mon Yan, Xiao-Dong Wang, Chun-Yen Chang, Heat transfer enhancement in microchannel heat sinks using nanofluids for International Journal of Heat and Mass Transfer 2012.
- [4] S.U.S. Choi, Enhancing thermal conductivity of fluids with nanoparticles, ASME FED231, 1995, pp. 99-103.
- [5] S. Lee, S.U.S. Choi, S. Li, J.A. Eastman, Measuring thermal conductivity of fluids containing oxide nanoparticles, ASME J. Heat Transfer 121 (1999) 280-289.
- [6] J. Koo, C. Kleinstreuer, A new thermal conductivity model for nanofluids, J. Nanopart. Res. 6 (2004) 577-588
- [7] Choi SUS. In: Singer DA, Wang HP, editors. Development and application of non-newtonian flows, vol. FED 231. New York: ASME; 1995. p. 99-105.
- [8] S. Lee, S.U.S. Choi, S. Li, J.A. Eastman, Measuring thermal conductivity of fluids containing oxide nanoparticles, ASME J. Heat Transfer 121 (1999) 280-289.
- [9] A. Bar-Cohen, P. Wang, E. Rahim, Thermal management of high heat flux nanoelectronic chips, Microgravity Science and Technology 19 (3) (2007) 48-52.
- [10] T.A. Ameel, R.O. Warrington, R.S. Wegeng, M.K. Drost, Miniaturization technologies applied to energy systems, Energy Convers. Mgmt. 38 (1997) 969-982.
- [11] Kandlikar S, Garimella S, Li D, Colin S, King MR. Heat transfer and fluid flow in minichannels and microchannels. Great Britain: Elsevier Ltd.;
- [12] Jung-Yeul Jung, Hoo-Suk Oh, and Ho-Young Kwak, 2009. Forced convective heat transfer of nanofluids in micro-channels. Int. J. Heat Mass Transfer 52, pp: 466-472.
- [13] W. Qu, I. Mudawar, A systematic method for optimal design of two-phase micro channels heat sink, ASME J. Electron, packaging 127(2005) 381-390.
- [14] J. Lee, I. Mudawar, implementation of micro-channel evaporator for high heat flux refrigeration cooling applications. ASME J. Electron. packaging 128(2006)30-37
- [15] S.S. Mehendal, A.M. Jacobi, R.K. Shah, Fluid flow and heat transfer at micro- and meso-scales with application to heat exchanger design, Appl. Mech. Rev. 53(2000)175-193.
- [16] H.A. Mohammed, P. Gunnasegaran, N.H. Shuaib, The impact of various nanofluid types on triangular microchannels heat sink cooling performance. Int. J. Heat Mass Transfer 38(2011) 767-773.
- [17] Z. HAO Zeng-hui, YU Jian - zu, Single - Phase Forced convection Heat Transfer in Micro Rectangular channels, Chinese Journal of Aeronautics 2003, 16(1):7-11
- [18] C.J. Ho, L.C. Wei, Z.W. Li, An experimental investigation of forced convective cooling performance of a microchannel heat sink with Al<sub>2</sub>O<sub>3</sub>/water nanofluid, Applied Thermal Engineering 30 (2010) 96-103.
- [19] F. Kreith, M.S. Bohn, principle of heat transfer, fifth ed, PWS publishing company, Boston MA, 1997
- [20] Tu-Chieh Hung, Wei-Mon Yan, Xiao-Dong, Chun-Yen Chang, Heat transfer enhancement in microchannel heat sinks using nanofluids, International Journal of Heat and Mass Transfer 2012.
- [21] (21) Kyo Sik Hwang, Seok Pil Jang, Stephen U.S. Choi, Flow and convective heat transfer characteristics of water-based Al<sub>2</sub>O<sub>3</sub> nanofluids in fully developed laminar flow regime, International Journal of Heat and Mass Transfer 52(2009)193-199.